


Test Certificate: Pneumatic Ancillary

BIFOLD ORDER NUMBER :
 CLIENT :
 CLIENT ORDER NUMBER :
 KIT NO. :
 PRODUCT :
 QTY :
 SERIAL NUMBER :

DATE :

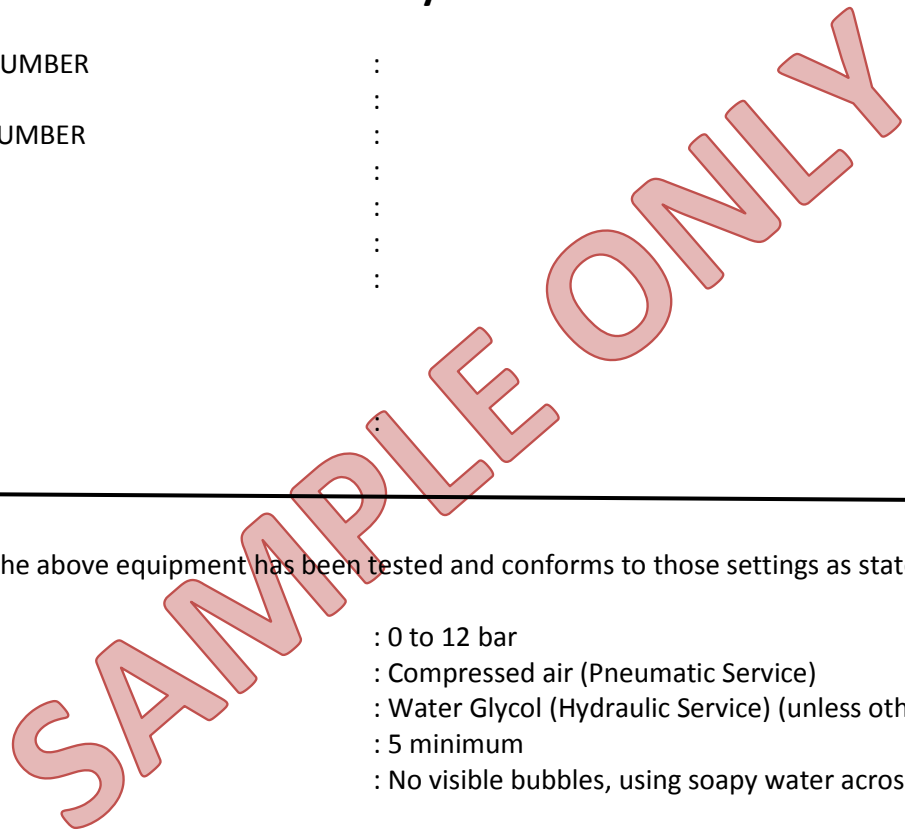

This certicates the above equipment has been tested and conforms to those settings as stated below.

Valve Pressure	: 0 to 12 bar
Test Medium	: Compressed air (Pneumatic Service)
	: Water Glycol (Hydraulic Service) (unless otherwise stated)
Test Cycles	: 5 minimum
Leak Tight	: No visible bubbles, using soapy water across all joints and ports.

Signed:

Name:

Note:

(Check valves are tested to hold pressure from 0.23 bar, in the check direction, and to flow at 0.23bar in the flow direction).

